



**12-24 VAC/VDC
200mA
Power Supply**
Sold Separately

Note:
Suggested Power Supply
*PS/DC12
PS/AC16*

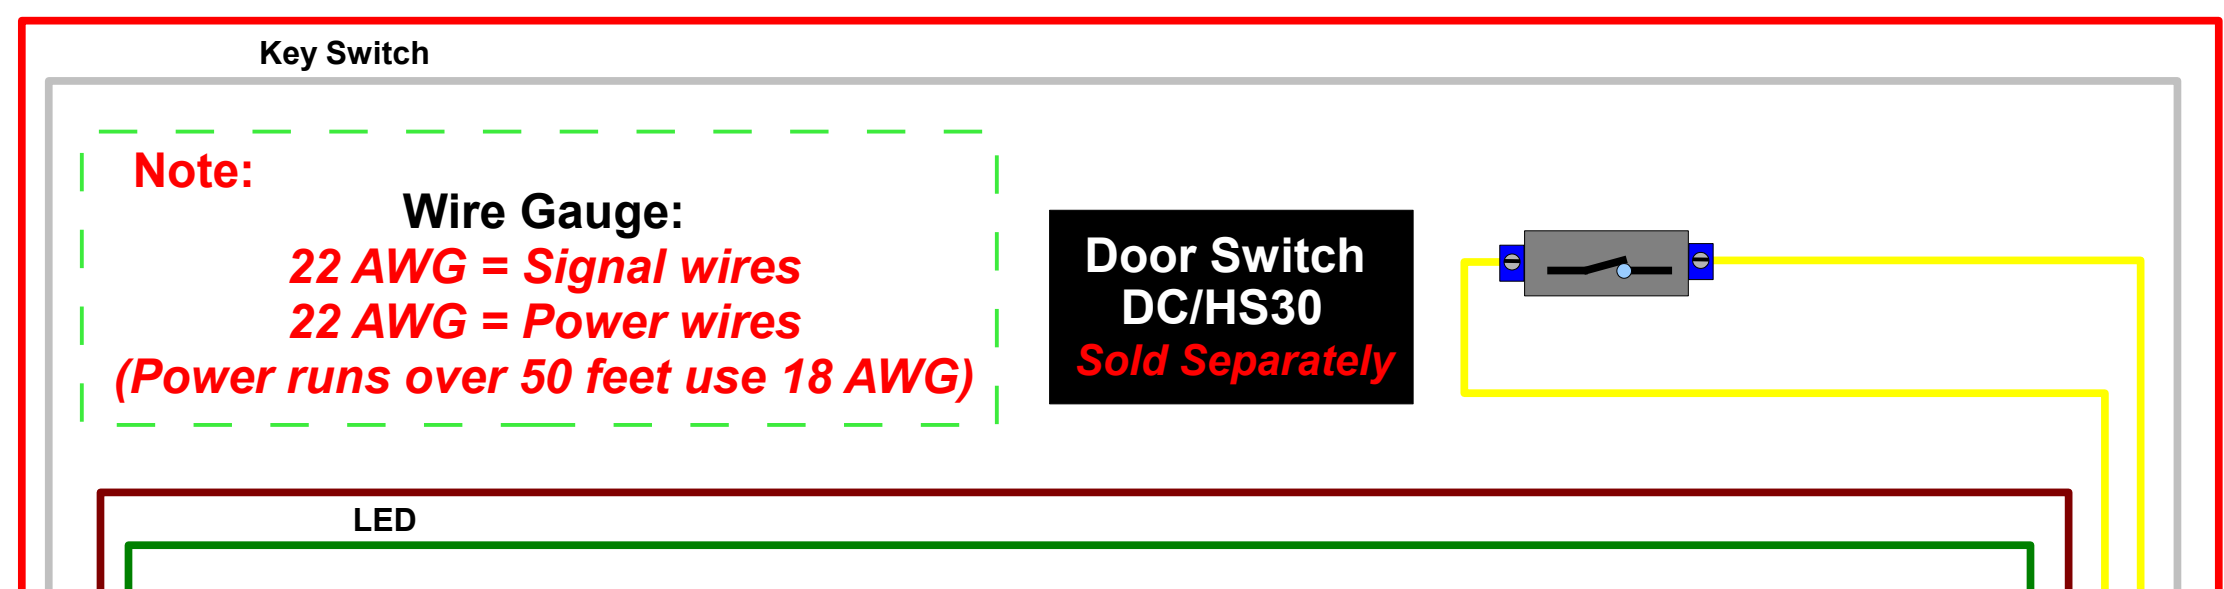

Note:
Wire Gauge:
22 AWG = Signal wires
22 AWG = Power wires
(Power runs over 50 feet use 18 AWG)

**Door Switch
DC/HS30**
Sold Separately

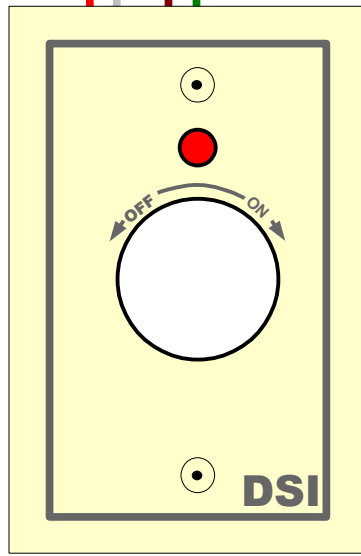


ES450-K4
Remote Key Switch
Sold Separately

1 Gang back box
2.5" deep





TS-1
1 2 3 4 5 6 7 8
2 Gang back box X 2.5" deep

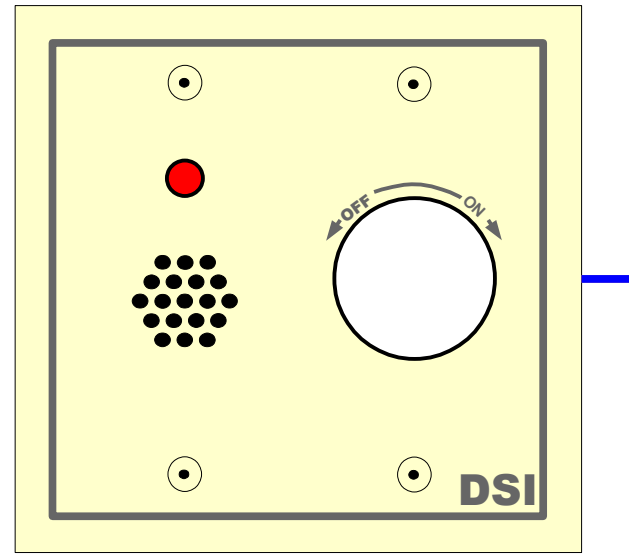


ES4300A-K4-T1 (Front view)
TS-2
1 2 3

COM
N/O
N/C
Note:
Key switch status

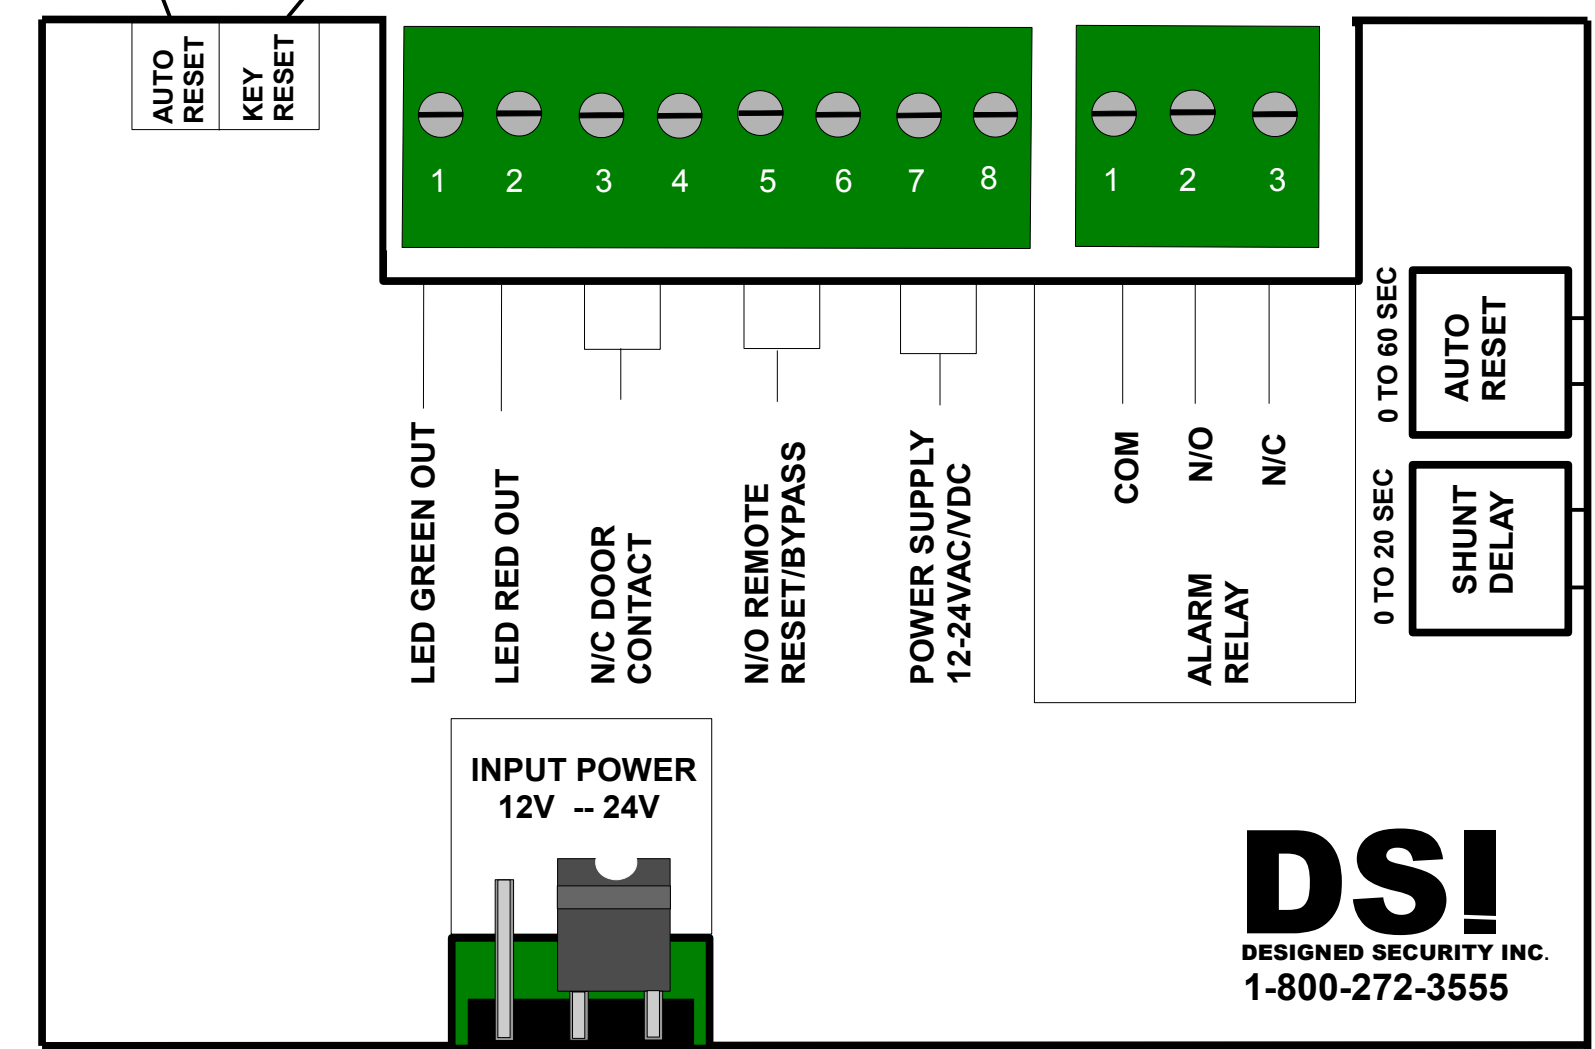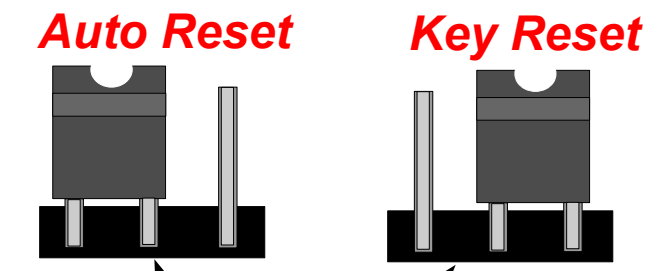


ES4300A-K4-T1 (Back view)

DSI!
DESIGNED SECURITY INC.
1-800-272-3555

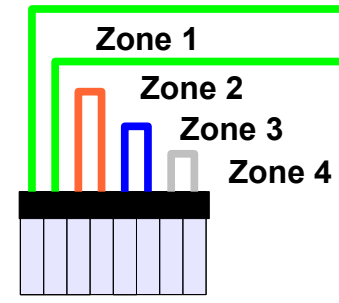

Note:
Connect all unused
zone wires together

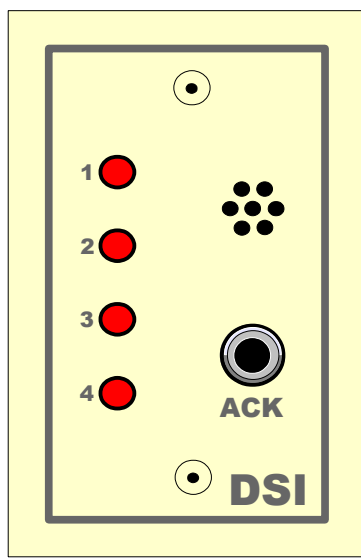


ES610
Alarms when the
zone contacts open
Located at the guard desk
Sold Separately

1 Gang back box
2.5" deep

**12 VDC
150mA
Power Supply**
Sold Separately

Specifications: ES4300A
Power: 12-24 VAC/VDC at (200mA)
Auto Reset: 0-60sec
Shunt Delay: 0-20sec
Input: N/C door contact
Output: N/C-N/O Alarm contact 1000mA at 30 VDC
Horn Volume: 103 dB

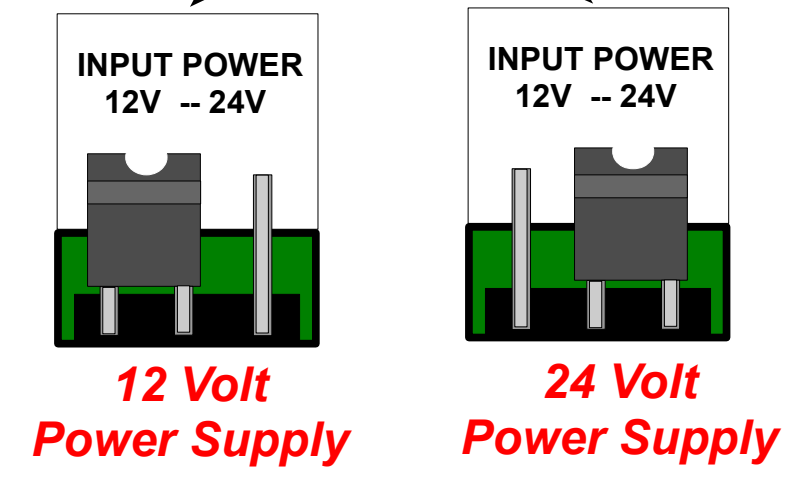

DSI!
DESIGNED SECURITY, INC.
1-800-272-3555

ES4300A-K4-T1