
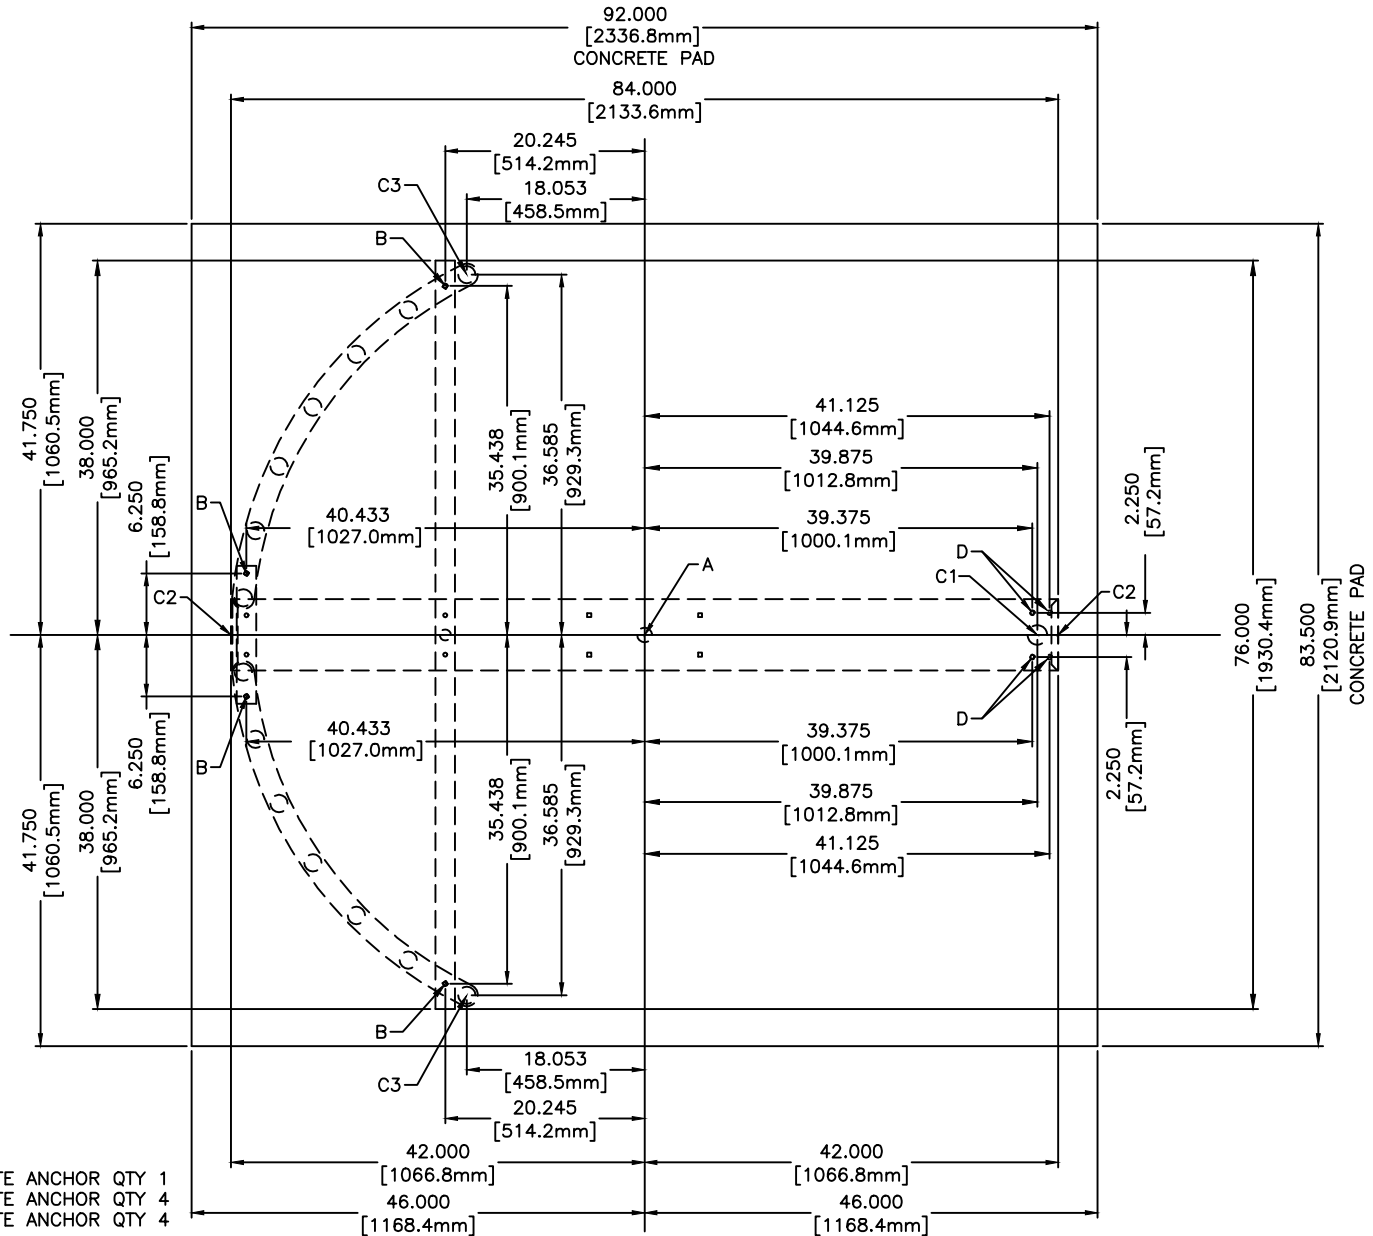


FOR USE ON GALVANIZED OR
POWDER COATED DS439-S MODELS

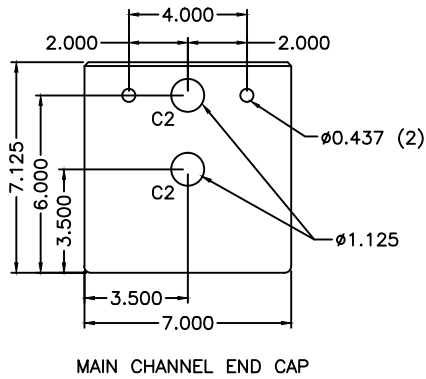

1. ALL DIMENSIONS ARE APPROXIMATE
2. DIMENSIONS ARE IN INCHES (mm)
3. DO NOT SCALE DRAWING

ANCHOR POINTS

- A = ϕ .625 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 1
- B = ϕ .375 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 4
- D = ϕ .500 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 4

SUGGESTED CONDUIT LOCATION

- C1 = THROUGH VERTICAL BARRIER (PREFERRED)
- C2 = THROUGH MAIN CHANNEL END CAP (TYP BOTH SIDES)
- C3 = THROUGH VERTICAL YOKE TUBE

CONCRETE PAD NOTE:

POUR PAD 4.000 [101.6mm] - 6.000 [152.4mm] THICK,
AND INSURE IT IS LEVEL \pm .125 [3.1mm]

DSI CONFIDENTIAL
PROPRIETARY INFORMATION
This document and the data disclosed
herein is not to be reproduced, used, or
disclosed in whole or in part without
the permission of DESIGNED SECURITY INC.

MATERIAL: N/A	SCALE: .5=12	APPROVED BY:	DRAWN BY: LC III
	DATE: 1/13/14		REVISED: 10/2018
FINISH: TOL. UNLESS OTHERWISE SPEC.	.X \pm .1 .XX \pm .015	330-273-6185 FAX 330-273-4468 USA 1-800-942-0829 FAX 1-800-942-0828	
	.XX \pm .03 ANGLES .5°	DS439-GV\PC ANCHOR POINTS\CONDUIT 2018	